




## GUARD PANEL REMOVAL AND RE-INSTALLATION

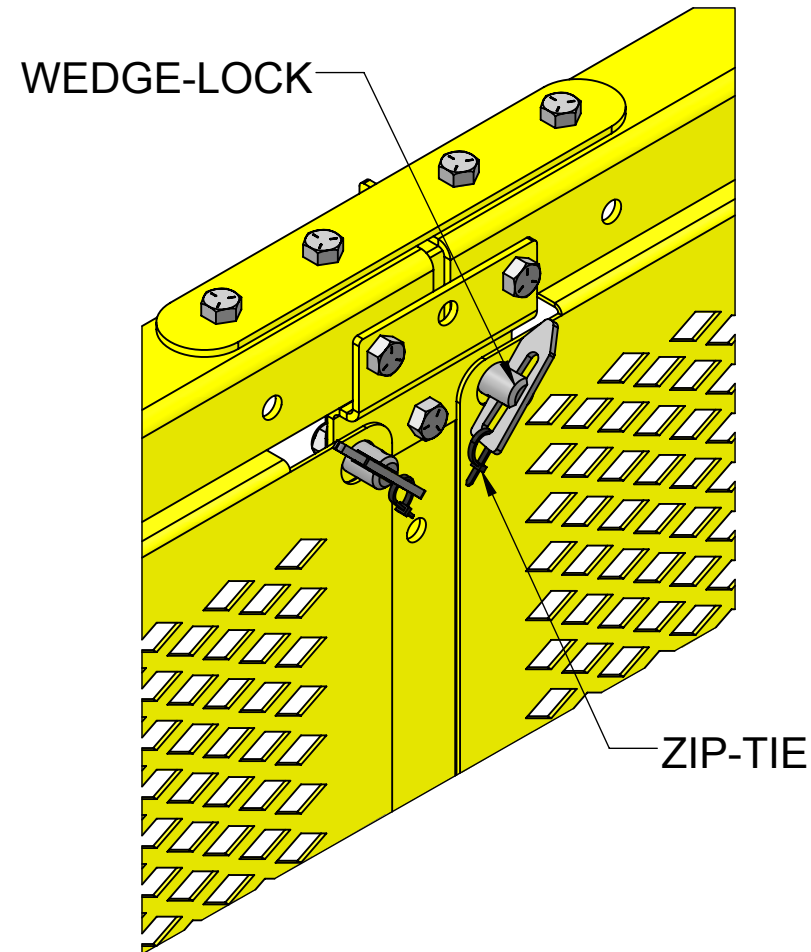

CUT THE TWO (2) ZIP-TIES LOOPED THROUGH THE WEDGE-LOCK ON THE TOP CORNERS OF THE GUARD PANEL YOU WANT TO REMOVE. USE A SIDE-CUTTER OR OTHER APPROPRIATE CUTTING TOOL

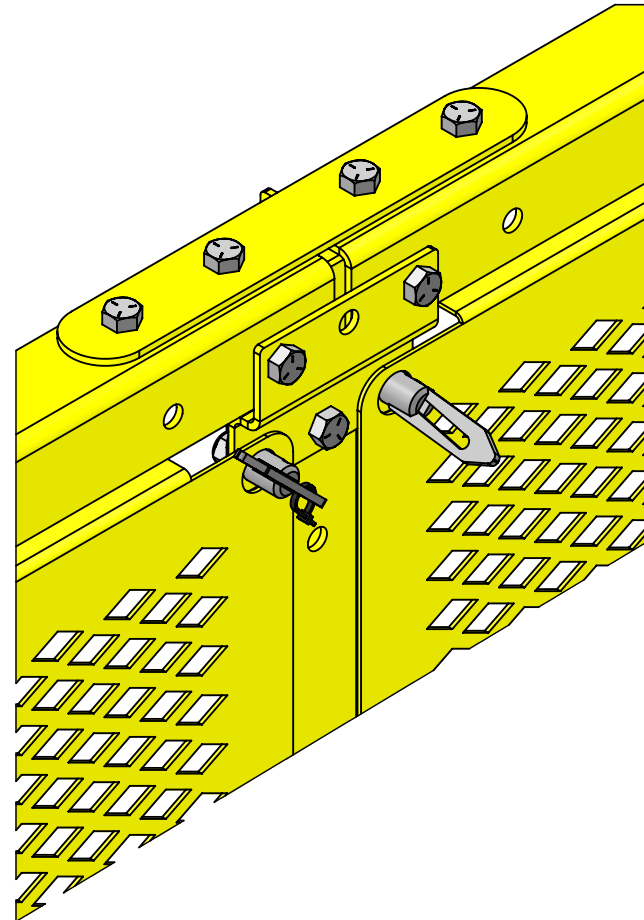

OPEN THE TWO (2) WEDGE-LOCKS YOU JUST REMOVED THE ZIP-TIES FROM. A HAMMER MAY BE REQUIRED TO KNOCK THE WEDGE LOCK LOOSE.

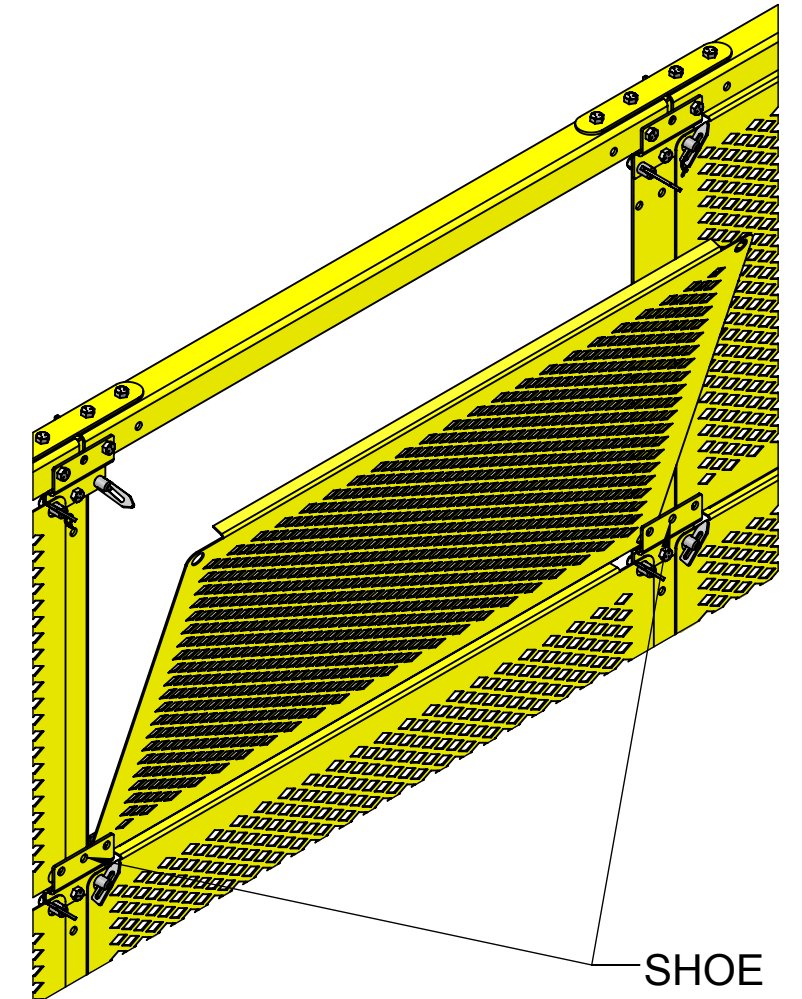

PULL THE TOP PART OF THE PANEL TOWARDS YOU SO THE PANEL SLIDES OFF THE OPEN WEDGE-LOCKS AND RESTS ON THE SHOES. THE PANEL MAY NOW BE LIFTED OFF THE SHOES AND SET OFF TO THE SIDE TO MAKE WAY FOR MAINTENANCE ON THE GUARDED EQUIPMENT.

TO RE-INSTALL GUARD PANEL, REPEAT THE STEPS SHOWN ABOVE IN REVERSE ORDER, CLOSING THE WEDGE-LOCK AND LOOPING IN A NEW ZIP-TIE